


DESIGNED BY CANADIANS FOR CANADIAN WINTERS

For over 25 years, Garagemac series radiant tube heaters have provided reliable, cost effective heat in shops and garages across Canada and the United States. Enjoy the luxury of comfortable, guiet, efficient radiant heat in your residential garage, home hobbyist shop, backyard auto shop, or man cave.



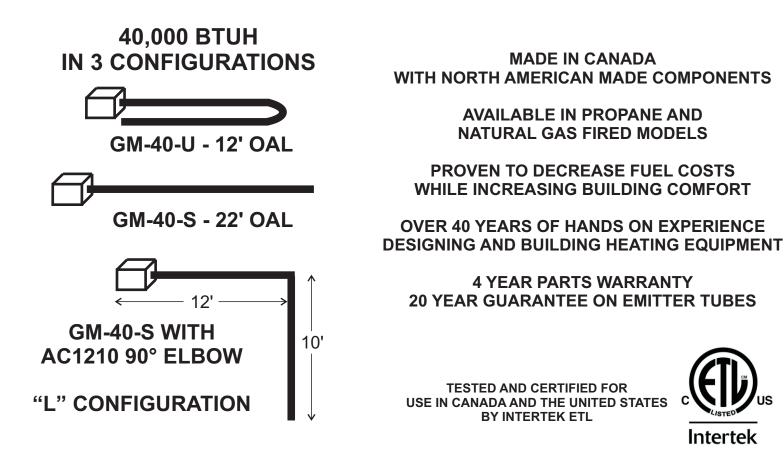

PERMANENTLY SEALED AND LUBRICATED BLOWER

Externally mounted for ease of service, complete with 4" outdoor combustion air adapter that allows for complete isolation from indoor air.

HEAVY GAUGE HIGHLY POLISHED ALUMINIUM REFLECTORS For maximum infrared heat distribution.

VERSATILE HANGERS Allows for horizontal or angle mounting of units.

3.5" DIA. SPECIALTY ALLOY **EMITTER TUBE**


Long lasting, corrosion resistant, high temperature coated, high performance tube system. Slip fit 10' sections allow for quick and easy installation with no couplers or clamps.

HOT SURFACE IGNITION

Field tested, reliable, and safe hot surface ignition system that lights even in the dampest of conditions. Sight glass for visual ignition confirmation.

sensing, combustion air, and exhaust blockage

GARAGES - WOODWORKING - MECHANIC SHOPS - MAN CAVES - OUT BUILDINGS



WIDTH

12"

22"

MODEL OAL

GM-40-U 12'

GM-40-S 22'

"I was meticulous in monitoring the heat in my workshop with an infrared thermometer to test the effectiveness of the heater, and I can honestly say I was amazed at what I found. The walls, concrete floor, and even items inside my shop cabinets remained at 65F regardless of the temperature outside. Checking the gas bill, I noticed no appreciable increase in gas consumption over last year's bill. I wish I had done this years ago."

18"

18"

ABOVE BACK SIDES

4"

⊿"

4"

Δ"

	- GORD GRAFF	Höme worksho
CLEARANCES	SPECI	FICATIONS

BELOW

36"

36"

ELECTRICAL
STARTING CURRENT: 3 AMPS
RUNNING CURRENT: 1 AMP
THERMOSTAT CONTROLS: 24V or 120V

GAS

MIN INLET: 7" W.C. NG, 11.5" W.C. LP MAX INLET: 14" W.C. NG, 14" W.C. LP MANIFOLD: 3.5" W.C. NG, 10" W.C. LP

REPRESENTED LOCALLY BY:

RW Infrared Sales Inc. 156 Archdekin Dr, Brampton, On. ph: 905-796-7131 fx: 905-796-0088 web: www.rwinfraredsalesinc.com

All units available in NG or LP fired models.

INPUT

40,000 BTUH


40,000 BTUH

ALL GARAGEMAC UNITS COME COMPLETE WITH A 1/2" NEOPRENE GAS FLEX CONNECTOR, 24V THERMOSTAT, AND SIDE WALL EXHAUST CAP FOR 4" TYPE "B" VENT.

MANUFACTURED IN CANADA

WAINFLEET, ON, CANADA LOS 1V0 ph: 905-899-3473 tf: 800-403-3279 fx: 905-899-2262 em: erw@vaxxine.com





FACTORY BUILT

TO YOUR SPECIFICATIONS

Ready to accept 24V or 120V

allows for quick and easy access.



shop